


室内灯测试报告

报告编号:


制造厂商:	厂商地址:	
灯具名称: LBD2750-4 3200K	灯具类型:	灯具重量:
灯具规格:	外型尺寸:	测试编号:

光源数据		峰值光强(cd)	51.56	最大距离比(C0/180)	1.34
型 号		灯具效率(%)	100.0	最大距离比(C90/270)	0.71
标称功率(W)	4	总光通量(lm)	121.42	电压(V)	217.1
额定电源电压(V)	218	光效率(lm/W)	29.6	电流(A)	0.042
额定光通量(lm)	121.4	上射光通比(%)	0.0	功率(W)	4.100
灯具内光源数(只)	1	下射光通比(%)	100.0	功率因数	0.451
实测电源电压(V)	217.2	有效光通量(lm)	121.4	能效指数(EEI)	0.262

配光曲线

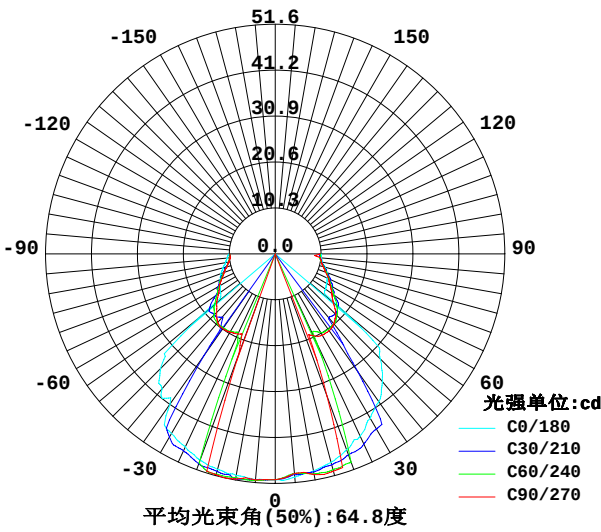

光强分布曲线

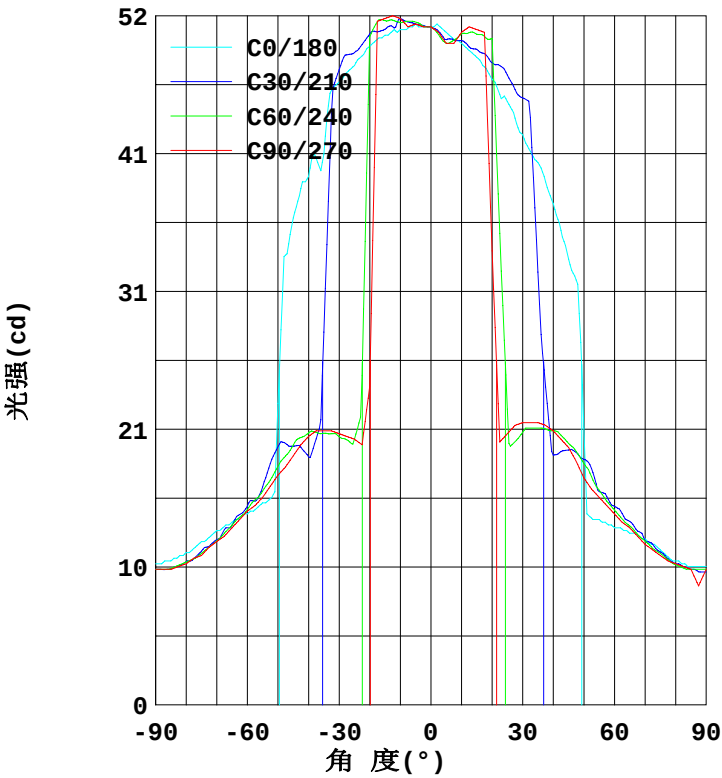


测试设备:虹谱HPG1900
温 度:25.3℃
测 试 员:
日 期:2018年09月26日

测试设置: 7.0度/秒 B-Beta 测试方案
湿 度:65.0%
距 离:14.390 m
备 注:

平均照度图

报告编号：

制造厂商：	厂商地址：	
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：
灯具规格：	外型尺寸：	测试编号：

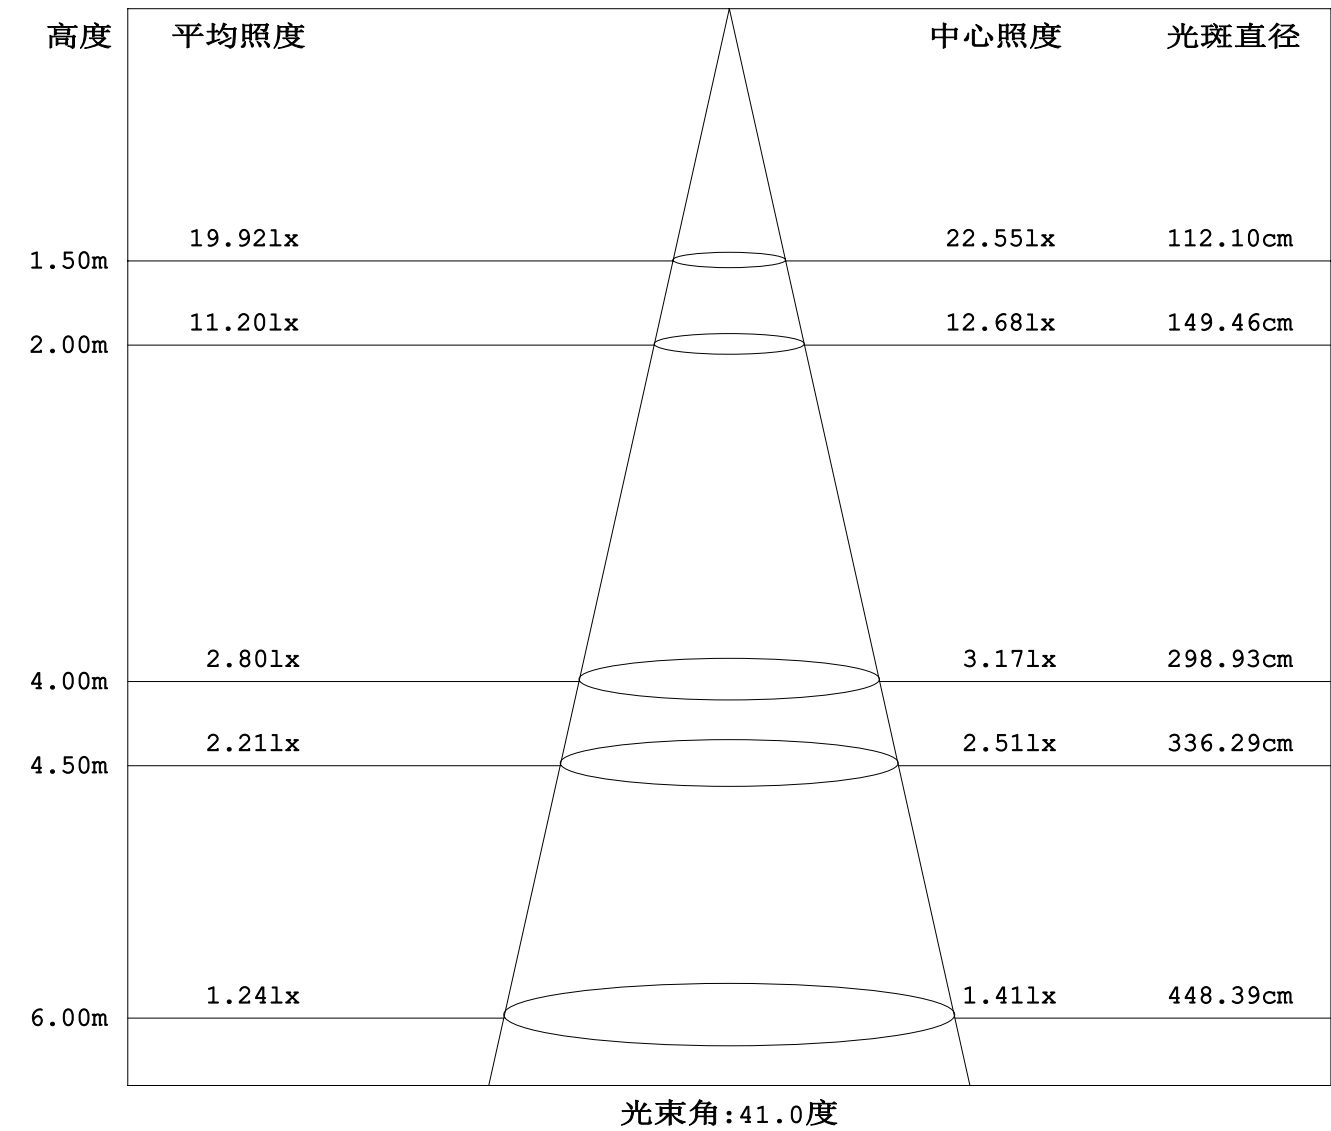

测试设备：虹谱HPG1900
温度：25.3℃
测试员：
日期：2018年09月26日

测试设置：7.0度/秒 B-Beta 测试方案
湿度：65.0%
距离：14.390 m
备注：

环带光通量测试报告

报告编号：

制造厂商：	厂商地址：	
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：
灯具规格：	外型尺寸：	测试编号：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总
5.0	50.93	51.02	50.93	50.87	50.31	49.66	49.49	50.32	0- 5	1.209	1.209
10.0	50.52	51.17	51.35	50.87	49.49	49.21	50.31	49.57	5- 10	3.605	4.815
15.0	50.11	50.94	51.35	50.19	48.45	49.09	50.52	49.80	10- 15	5.975	10.79
20.0	49.28	50.20	23.81	49.17	46.79	48.80	33.95	49.85	15- 20	8.038	18.82
25.0	47.83	39.59	19.87	40.40	45.14	43.77	20.29	45.48	20- 25	8.186	27.01
30.0	46.59	19.13	20.29	19.31	42.65	20.53	21.12	20.93	25- 30	8.292	35.30
35.0	41.20	19.78	20.50	19.47	40.58	20.21	21.12	20.20	30- 35	8.646	43.95
40.0	39.55	20.12	20.08	19.67	37.48	20.28	20.50	20.38	35- 40	8.891	52.84
45.0	36.44	19.60	18.63	19.62	33.33	19.67	19.25	19.64	40- 45	9.017	61.86
50.0	22.57	18.80	17.18	18.62	20.70	18.61	16.97	19.01	45- 50	8.691	70.55
55.0	15.11	16.99	15.53	16.91	13.87	17.03	15.53	17.38	50- 55	7.355	77.90
60.0	14.28	14.91	14.49	15.02	13.25	14.90	14.28	15.06	55- 60	6.983	84.89
65.0	13.66	13.48	13.25	13.35	12.83	13.60	13.25	13.62	60- 65	6.766	91.65
70.0	13.04	12.38	12.21	12.44	12.42	12.38	12.01	12.40	65- 70	6.505	98.16
75.0	12.21	11.43	11.18	11.43	11.59	11.30	11.18	11.45	70- 75	6.197	104.3
80.0	11.38	10.68	10.56	10.67	10.76	10.56	10.56	10.68	75- 80	5.885	110.2
85.0	10.76	10.14	10.14	10.11	10.35	10.14	10.14	10.14	80- 85	5.646	115.8
90.0	10.56	10.14	10.14	10.14	10.35	10.14	10.14	10.14	85- 90	5.534	121.4
95.0									90- 95		
100.0									95-100		
105.0									100-105		
110.0									105-110		
115.0									110-115		
120.0									115-120		
125.0									120-125		
130.0									125-130		
135.0									130-135		
140.0									135-140		
145.0									140-145		
150.0									145-150		
155.0									150-155		
160.0									155-160		
165.0									160-165		
170.0									165-170		
175.0									170-175		
180.0									175-180		
单位：°	单位：cd									单位：lm	


测试设备：虹谱HPG1900
温度：25.3℃
测试员：
日期：2018年09月26日

测试设置：7.0度/秒 B-Beta 测试方案
湿度：65.0%
距离：14.390 m
备注：

矩形等光强曲线测试报告

报告编号：

制造厂商：	厂商地址：	
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：
灯具规格：	外型尺寸：	测试编号：

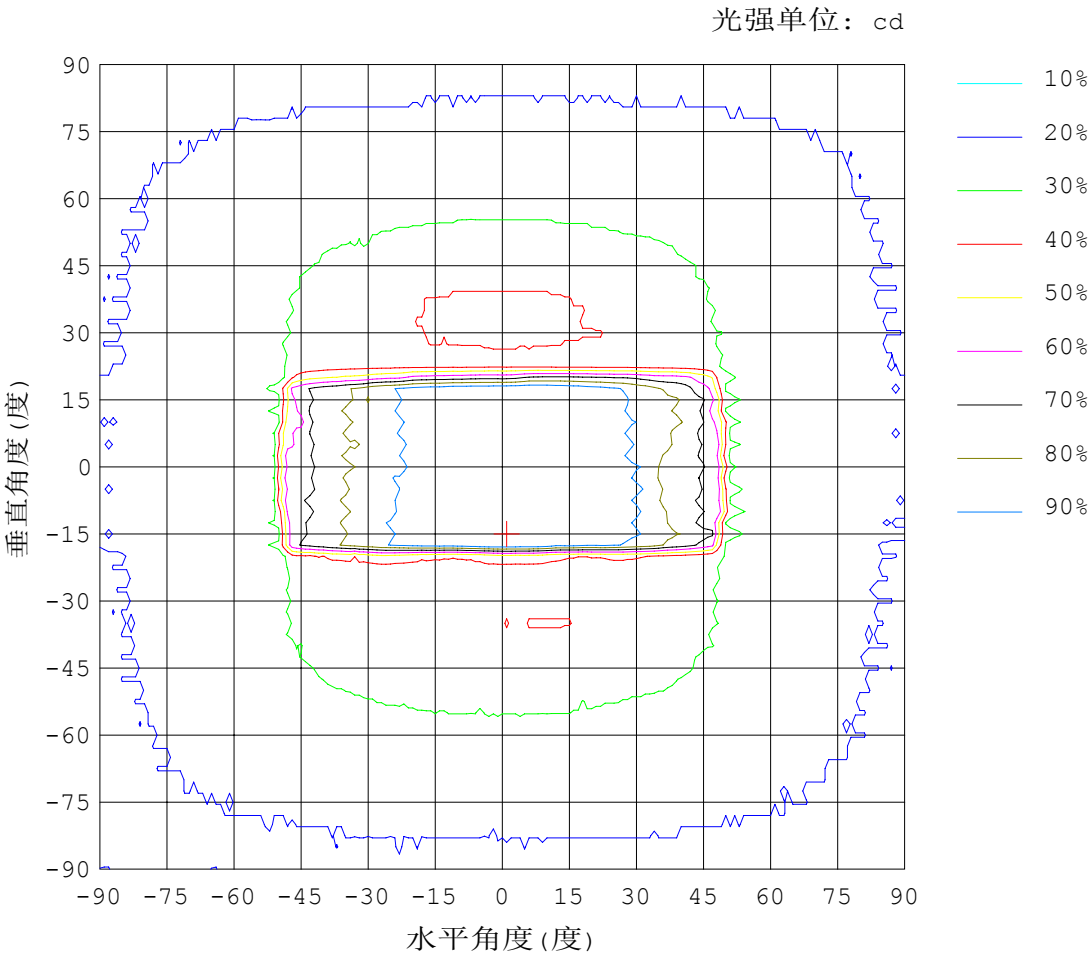



测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置: 7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注:

等照度测试报告

报告编号：

制造厂商：	厂商地址：	
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：
灯具规格：	外型尺寸：	测试编号：

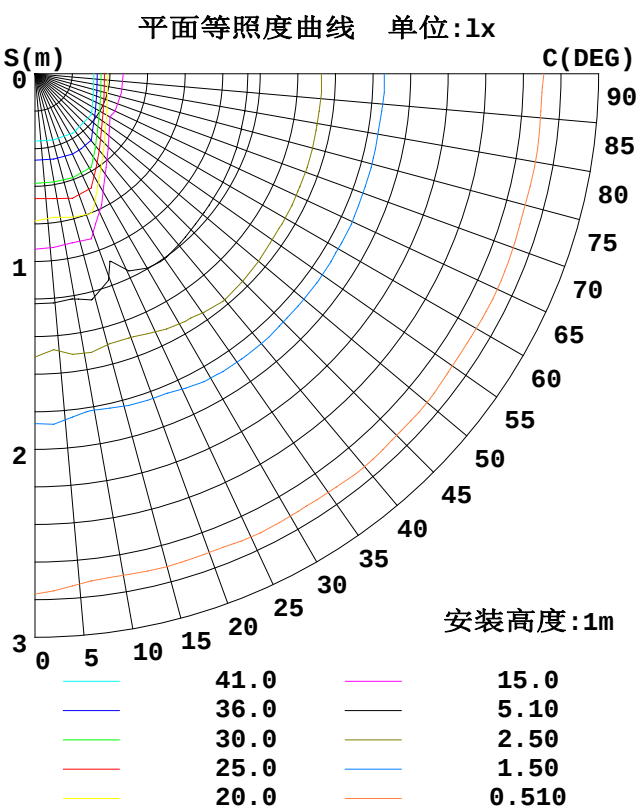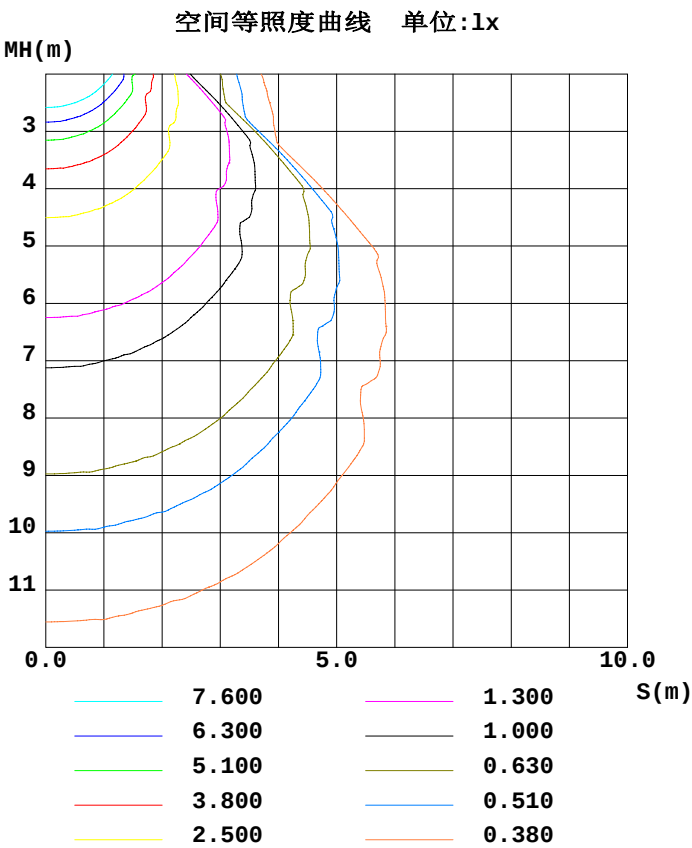

测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置: 7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注:

光强数据表格报告

报告编号：

制造厂商：	厂商地址：		
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：	
灯具规格：	外型尺寸：	测试编号：	

单位：cd

C (度) γ (度)															
	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70
0.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
5.0	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	51.0	51.0	51.0	51.0	51.1	51.1
10.0	50.5	50.5	50.5	50.6	50.8	51.1	51.3	51.2	51.2	51.1	51.1	51.1	51.0	51.2	51.3
15.0	50.1	50.1	50.1	50.4	50.6	50.5	50.5	50.7	50.9	50.9	50.9	51.0	51.1	51.3	51.4
20.0	49.2	48.9	49.3	49.7	49.4	49.5	50.1	50.0	50.0	50.2	49.7	49.3	49.9	42.1	35.5
25.0	47.8	47.4	48.2	48.1	48.5	48.7	48.8	49.2	47.9	39.5	24.6	20.4	19.8	19.5	19.6
30.0	46.5	46.1	46.8	46.7	47.0	47.4	47.5	38.5	20.7	19.1	19.3	19.9	20.0	20.3	20.3
35.0	41.2	42.0	43.3	45.2	45.0	45.1	27.8	19.4	19.6	19.7	19.9	20.2	20.3	20.4	20.5
40.0	39.5	39.2	39.3	39.7	41.4	24.0	18.5	19.8	20.1	20.1	19.8	20.1	20.3	20.3	20.3
45.0	36.4	35.8	36.6	38.7	27.0	18.0	19.3	20.2	19.8	19.6	19.4	19.5	19.4	19.3	19.0
50.0	22.5	22.8	24.8	27.5	16.6	18.0	19.3	19.5	19.0	18.8	18.1	17.9	17.8	17.5	17.3
55.0	15.1	14.4	14.9	14.6	14.8	15.3	16.2	17.4	17.4	16.9	16.3	16.2	15.9	15.8	15.7
60.0	14.2	14.0	13.8	13.8	14.0	14.3	14.8	15.0	14.9	14.9	14.6	14.7	14.6	14.4	14.4
65.0	13.6	13.5	13.0	12.9	13.1	13.3	13.4	13.6	13.5	13.4	13.4	13.5	13.4	13.4	13.2
70.0	13.0	12.5	12.2	12.3	12.2	12.4	12.3	12.3	12.5	12.3	12.4	12.2	12.2	12.3	12.2
75.0	12.2	11.3	11.4	11.5	11.4	11.1	11.5	11.3	11.4	11.4	11.4	11.3	11.3	11.2	11.3
80.0	11.3	10.6	10.7	10.7	10.5	10.5	10.7	10.5	10.5	10.6	10.5	10.5	10.6	10.6	10.6
85.0	10.7	10.3	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.2	10.2	10.1	10.1
90.0	10.5	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1

测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置: 7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注:

光强数据表格报告

报告编号：

制造厂商：	厂商地址：				
灯具名称：LBD2750-4 3200K	灯具类型：			灯具重量：	
灯具规格：	外型尺寸：			测试编号：	

单位：cd

C(度) γ (度)		75	80	85	90	95	100	105	110	115	120	125	130	135	140	145
0.0		50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
5.0		51.1	51.1	51.0	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.9	50.8	50.8	50.7
10.0		51.3	51.3	51.3	51.3	51.1	51.0	51.1	51.1	51.1	51.1	51.0	51.0	50.8	50.7	50.4
15.0		51.3	51.4	51.5	51.3	51.2	51.1	51.1	50.9	50.6	50.0	50.4	50.4	50.1	50.0	50.0
20.0		30.4	26.4	24.3	23.8	24.0	25.8	29.0	34.2	40.9	48.9	49.0	49.3	49.1	49.2	49.1
25.0		19.8	19.8	19.8	19.8	19.8	19.8	19.6	19.4	19.3	19.6	20.5	25.2	40.4	48.2	47.7
30.0		20.4	20.2	20.2	20.2	20.2	20.2	20.1	20.0	19.8	19.7	19.3	19.0	19.3	22.8	39.2
35.0		20.6	20.6	20.5	20.5	20.4	20.4	20.4	20.2	20.0	19.9	19.3	19.5	19.4	19.3	20.2
40.0		20.2	20.1	20.1	20.0	20.1	20.1	20.0	20.1	20.0	19.9	19.8	19.6	19.6	20.0	19.6
45.0		18.9	18.7	18.6	18.6	18.6	18.7	18.8	19.0	19.1	19.2	19.3	19.4	19.6	19.8	19.7
50.0		17.2	17.1	17.1	17.1	17.0	17.1	17.3	17.3	17.6	17.7	17.8	18.2	18.6	19.2	19.1
55.0		15.7	15.6	15.7	15.5	15.5	15.6	15.7	15.8	15.9	16.0	16.2	16.5	16.9	17.6	17.1
60.0		14.4	14.3	14.4	14.4	14.4	14.3	14.5	14.4	14.7	14.6	14.7	14.9	15.0	15.0	14.9
65.0		13.2	13.2	13.2	13.2	13.2	13.3	13.2	13.3	13.4	13.3	13.5	13.5	13.3	13.6	13.6
70.0		12.1	12.1	12.0	12.2	12.2	12.1	12.1	12.2	12.2	12.2	12.3	12.3	12.4	12.3	12.5
75.0		11.2	11.2	11.1	11.1	11.2	11.2	11.2	11.3	11.2	11.3	11.2	11.3	11.4	11.4	11.3
80.0		10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6	10.6	10.6	10.6	10.5	10.6	10.5	10.5
85.0		10.1	10.1	10.3	10.1	10.1	10.1	10.1	10.1	9.89	9.95	10.2	10.1	10.1	10.1	10.1
90.0		10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1

光强数据表格报告

报告编号：

制造厂商：	厂商地址：		
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：	
灯具规格：	外型尺寸：	测试编号：	

单位：cd

C (度) γ (度)	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220
0.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
5.0	50.7	50.6	50.6	50.5	50.4	50.3	50.3	50.2	50.1	50.1	50.0	49.9	49.7	49.6	49.6
10.0	50.3	50.3	50.2	50.1	49.9	49.7	49.4	49.4	49.4	49.4	49.5	49.6	49.6	49.7	49.6
15.0	50.2	49.8	49.3	49.2	49.3	48.9	48.4	48.6	48.8	48.6	48.6	48.8	49.0	48.8	48.6
20.0	48.6	48.3	48.7	47.8	47.7	47.5	46.7	47.2	47.2	47.1	47.8	47.9	48.0	48.8	49.0
25.0	47.8	47.3	46.5	46.2	45.8	46.1	45.1	45.7	45.3	45.9	46.0	46.5	47.1	47.1	47.6
30.0	45.9	45.4	44.4	44.4	43.9	44.2	42.6	43.8	43.6	44.1	44.2	44.9	45.4	40.8	28.6
35.0	29.2	43.5	42.7	41.6	41.9	41.3	40.5	41.2	41.6	41.2	42.3	42.4	32.3	21.3	19.4
40.0	18.5	25.9	40.2	39.8	38.6	37.8	37.4	38.1	38.7	39.7	39.2	29.0	18.6	19.4	20.0
45.0	19.2	18.0	28.6	36.5	34.9	33.8	33.3	32.9	31.8	35.6	30.2	18.1	19.0	19.4	19.6
50.0	18.8	18.2	17.1	29.6	23.4	22.6	20.7	21.5	21.4	27.5	17.5	18.0	18.3	18.5	18.8
55.0	16.0	15.4	14.8	14.0	14.5	14.7	13.8	14.7	14.6	14.6	14.9	15.4	15.9	16.9	17.2
60.0	14.7	14.4	14.0	13.6	14.1	13.9	13.2	14.0	14.3	13.8	14.2	14.5	14.8	14.9	14.9
65.0	13.7	13.5	13.2	13.1	12.8	13.1	12.8	13.2	13.0	13.1	13.3	13.6	13.7	13.6	13.6
70.0	12.3	12.4	12.3	12.2	12.1	12.7	12.4	12.8	12.3	12.2	12.5	12.4	12.3	12.5	12.3
75.0	11.4	11.3	11.3	11.4	11.5	11.8	11.5	12.0	11.7	11.5	11.5	11.5	11.4	11.3	11.3
80.0	10.5	10.7	10.7	10.5	10.6	10.7	10.7	10.8	10.8	10.7	10.7	10.7	10.5	10.5	10.5
85.0	10.1	10.1	10.1	10.1	10.1	10.1	10.3	10.3	10.3	10.1	10.1	10.1	10.1	9.85	10.1
90.0	10.1	10.3	10.1	10.1	10.1	10.1	10.3	10.1	9.93	10.1	10.1	10.1	9.93	10.1	10.1

测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置：7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注:

光强数据表格报告

报告编号：

制造厂商：	厂商地址：		
灯具名称：LBD2750-4 3200K	灯具类型：	灯具重量：	
灯具规格：	外型尺寸：	测试编号：	

单位：cd

C (度) γ (度)	225	230	235	240	245	250	255	260	265	270	275	280	285	290	295
0.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
5.0	49.6	49.6	49.6	49.5	49.4	49.3	49.3	49.3	49.4	49.4	49.5	49.7	49.7	49.6	49.7
10.0	49.2	49.6	49.9	50.2	50.4	50.5	50.5	50.4	50.3	50.3	50.4	50.4	50.1	49.7	49.5
15.0	49.0	49.4	49.6	50.1	50.4	50.5	50.6	50.7	50.5	50.5	50.7	50.9	50.8	50.5	50.3
20.0	48.8	48.9	49.6	49.8	44.9	41.0	38.1	36.0	34.6	33.9	34.7	36.7	39.7	43.0	46.5
25.0	43.7	35.1	28.1	22.1	19.4	19.7	19.8	20.0	20.2	20.2	20.2	20.1	20.0	19.8	19.4
30.0	20.5	19.5	19.9	20.3	20.6	20.7	20.8	20.8	21.1	21.1	21.1	21.0	20.9	20.7	20.7
35.0	20.2	20.5	20.5	20.7	20.9	20.9	20.9	20.9	20.9	21.1	21.0	20.9	20.9	20.8	20.7
40.0	20.2	20.2	20.3	20.5	20.7	20.5	20.6	20.5	20.5	20.5	20.5	20.5	20.6	20.6	20.5
45.0	19.6	19.8	19.7	19.5	19.5	19.4	19.3	19.1	19.1	19.2	19.2	19.1	19.3	19.4	19.5
50.0	18.6	18.7	18.3	18.0	17.9	17.5	17.3	17.1	17.0	16.9	17.0	17.1	17.3	17.7	17.9
55.0	17.0	16.7	16.2	16.0	15.9	15.7	15.6	15.6	15.5	15.5	15.5	15.6	15.6	15.7	15.8
60.0	14.9	14.9	14.5	14.5	14.6	14.4	14.3	14.3	14.3	14.2	14.3	14.3	14.5	14.5	14.4
65.0	13.6	13.5	13.4	13.3	13.2	13.1	13.2	13.2	13.1	13.2	13.2	13.1	13.2	13.2	13.2
70.0	12.3	12.3	12.2	12.2	12.2	12.2	12.1	12.0	12.0	12.0	12.1	12.0	12.1	12.2	12.1
75.0	11.3	11.3	11.2	11.3	11.2	11.2	11.2	11.2	11.1	11.1	11.1	11.2	11.2	11.3	11.2
80.0	10.5	10.5	10.5	10.4	10.5	10.6	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.6
85.0	10.1	10.1	10.0	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1	10.1
90.0	10.1	10.1	10.1	10.1	9.93	10.1	10.1	10.1	10.1	10.1	10.1	9.93	10.1	9.93	9.93

测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置：7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注:

光强数据表格报告

报告编号：

制造厂商：	厂商地址：		
灯具名称： LBD2750-4 3200K	灯具类型：	灯具重量：	
灯具规格：	外型尺寸：	测试编号：	

单位： cd

C (度) γ (度)	300	305	310	315	320	325	330	335	340	345	350	355
0.0	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7	50.7
5.0	49.8	50.0	50.2	50.3	50.4	50.4	50.5	50.6	50.7	50.7	50.8	50.8
10.0	49.3	49.2	49.1	49.5	50.2	50.6	50.7	50.6	50.5	50.3	50.4	50.4
15.0	50.1	49.7	49.5	49.8	50.2	50.2	49.9	49.8	49.8	49.7	49.5	49.7
20.0	50.5	50.1	49.9	49.8	49.6	49.5	49.5	49.1	48.8	49.1	48.9	48.8
25.0	22.7	30.5	38.6	45.4	48.9	49.0	48.3	48.1	47.9	47.5	47.8	47.2
30.0	20.3	20.0	19.5	20.9	33.7	43.4	47.2	46.9	46.6	46.1	46.1	45.6
35.0	20.8	20.6	20.5	20.2	19.5	22.9	37.8	44.3	43.8	44.5	43.8	43.4
40.0	20.4	20.3	20.2	20.3	20.1	19.5	18.5	34.5	41.2	41.1	40.5	39.7
45.0	19.8	19.9	19.6	19.6	19.2	19.3	19.0	18.1	34.1	38.0	37.0	35.9
50.0	18.2	18.5	18.6	19.0	18.6	18.6	18.3	18.0	18.2	25.9	22.4	22.0
55.0	16.1	16.3	16.7	17.3	17.2	17.0	16.1	15.3	15.0	15.3	14.9	14.3
60.0	14.6	14.7	14.8	15.0	14.9	15.1	14.9	14.5	14.2	13.9	14.0	13.8
65.0	13.4	13.5	13.5	13.6	13.7	13.7	13.6	13.3	13.3	13.1	13.5	13.5
70.0	12.2	12.3	12.4	12.4	12.5	12.4	12.4	12.5	12.4	12.5	12.4	12.6
75.0	11.3	11.2	11.4	11.4	11.4	11.5	11.5	11.5	11.4	11.5	11.4	11.6
80.0	10.6	10.5	10.6	10.6	10.5	10.7	10.7	10.7	10.7	10.7	10.9	10.8
85.0	10.2	10.1	10.2	10.1	10.1	10.1	10.1	10.1	10.2	10.2	10.1	10.3
90.0	9.93	9.93	10.1	10.1	10.1	10.1	10.1	9.93	9.93	10.1	10.1	10.1

测试设备:虹谱HPG1900
温度:25.3℃
测试员:
日期:2018年09月26日

测试设置： 7.0度/秒 B-Beta 测试方案
湿度:65.0%
距离:14.390 m
备注: